

Mysolar

PLATI BIFACIAL M120B

PERC HALF CELL
MONO MODULE

355-375W Framed

POSITIVE TOLERANCE 0~+6W
HALF CELL PERC MONO 120

New Energy, Smart Living



Window Cleaning Robot
Mamibot W120-T

Robot Vacuum Cleaner
Mamibot Yslam EXVAC6805

WHY MYSOLAR?



MBB Solar Cells

Mysolar panels have multi-busbars that can reduce current heat loss of the cells and increase the current collection ability.



Strong and Safe

Mysolar panels are certified to withstand 2400 Pa negative load of wind and 5400 Pa positive load of snow.



1500V System Voltage

Mysolar panels are of 1500V system voltage design compatible to 1500V and reduces BoS cost greatly.



Dual Side Power Producing

Mysolar bifacial panels have up to 70% bifaciality, generating up to 25.2% more energy yield than conventional panels.



Better Low Light Output

Mysolar uses the best solar glass, cells, and assembling technology to guarantee good performance in cloudy days or low light conditions.



More Options for Solar Projects

More possible purposes like vertical installations, BIPV's, areas of high humidity, strong wind/snow, and deserts.



Positive Tolerance

Mysolar guarantees that all solar modules manufactured by Mysolar have 0~6W positive tolerance.



Confident Warranty

Mysolar offers 12 years limited product warranty and 30 years performance warranty for Bifacial solar modules.




Higher Output

With multi-busbar (5BB) cells, and 1500V system voltage, super solar glass, Mysolar panels have higher output than its competitors.



High Reliability


Mysolar has complete testing facilities for tests of UV, TC, HF, EL, etc tests. 100% of Mysolar panels were tested & minimumly twice EL tests guaranteed.

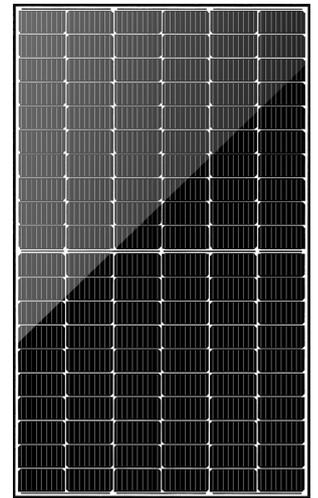

Made in China

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty · 30 Year Linear Power Warranty

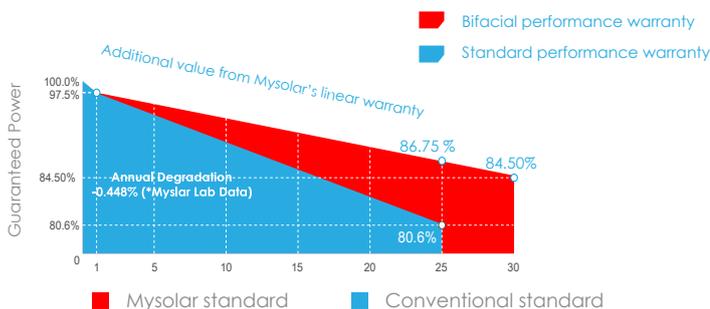

Fire Safety Class: Class C according to UL790

- ISO9001:2015 Quality management systems
- ISO14001: 2015 Quality management systems
- OHSAS18001: 2018 Occupational health and safety management systems
- IEC61215, IEC61730, UL1703 certified product



SPECIFICATIONS (STC*)

Module Type	MS355M-DHBP	MS360M-DHBP	MS365M-DHBP	MS370M-DHBP	MS375M-DHBP
	STC	STC	STC	STC	STC
Maximum Power (Pmax)	355Wp	360Wp	365Wp	370Wp	375Wp
Maximum Power Voltage (Vmp)	33.37V	33.59V	33.80V	34.01V	34.22V
Maximum Power Current (Imp)	10.64A	10.72A	10.80A	10.88A	10.96A
Open-circuit Voltage (Voc)	40.21V	40.41V	40.61V	40.81V	41.01V
Short-circuit Current (Isc)	11.09A	11.17A	11.25A	11.33A	11.41A
Module Efficiency STC (%)	18.90%	19.20%	19.40%	19.70%	20.00%
Operating Temperature (°C)	-40°C~+85°C				
Maximum System Voltage	1500VDC (IEC)				
Maximum Series Fuse Rating	20A				
Power Tolerance	0~+6W				
Temperature Coefficients of Pmax	-0.38%/°C				
Temperature Coefficients of Voc	-0.31%/°C				
Temperature Coefficients of Isc	0.048%/°C				
Nominal Module Operating Temperature (NMOT)	42±2°C				

REAR SIDE POWER GAIN (BIFACIAL OUTPUT, FOR 355W/Bifaciality 70%)

Power Gain (Percentage)	10%	15%	20%	25%	30%
Maximum Power (Pmax)	380Wp	390Wp	405Wp	415Wp	425Wp
Maximum Power Voltage (Vmp)	33.37V	33.37V	33.38V	33.38V	33.38V
Maximum Power Current (Imp)	11.39A	11.69A	11.99A	12.44A	12.74A
Open-circuit Voltage (Voc)	40.21V	40.21V	40.22V	40.22V	40.22V
Short-circuit Current (Isc)	11.86A	12.17A	12.47A	12.93A	13.23A

STC: Irradiance 1000W/sqm Cell Temp: 25°C, AM=1.5°C

NMOT* (Nominal Module Operating Temperature):

Irradiance 800W/sqm, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

*Power measurement tolerance: -/+3%




Mechanical Characteristics

Cell Type	Mono PERC 166×83mm (9BB)
No. of cells	120 (6×10×6×10)
Dimensions	1792×1048×30mm
Weight	24.00KG
Glass	2.0mm Anti-Reflection Coating, High Transmission, Tempered Glass
Frame	Anodized aluminium alloy
Junction Box	QC solar QC171721-abc/Sunter PV-ZH011C-2
Cable & Connector	4mm ² cable 300mm QC solar QC4.10-cd/Sunter PV PV-ZH202B

Package info

(Two pallets = One stack)

35pcs/pallet, 840pcs/40'HQ Container

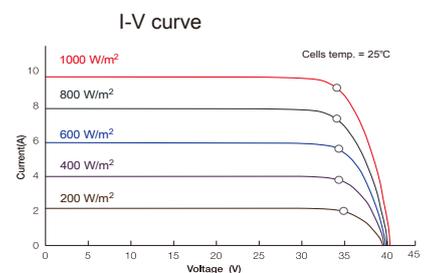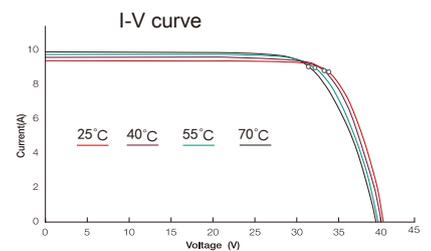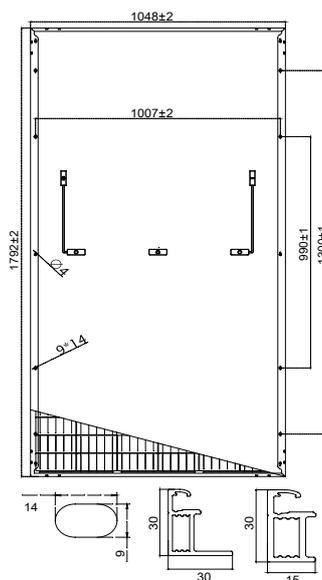

Mysolar reserves the right to make necessary adjustment to the information described herein at any time without further notice due to continuous innovation and product improvement. Please be kindly noted installation of Mysolar solar modules shall be done by professional skilled people. Please read the installation manual carefully before using Mysolar solar panels.

Mysolar is a **Mamibot** company and brand, **Mysolar** and **Mamibot** are trademarks of Mamibot Manufacturing USA Inc.

Mamibot Manufacturing USA Inc.

www.mamibot.com Tel: 001 302 428 9888 sales@mamibot.com Head Office: Orange St. #600, Wilmington, New Castle, 19899, Delaware, USA

Mysolar Manufacturing (Shanghai) Co., Ltd.

www.imysolar.com www.mamibot.com/mysolar Tel: 0086 21 62147369 North Part, 21ST Fl, No.1, LN1040, Caoyang Rd, Putuo Dist, Shanghai, P.R.C.